

# 12W R63-R80 REFLECTA LED DOWNLIGHTER

Ideal Retrofit for R63/R80, HiSpot63 and HiSpot80 Downlighters



Dimmable



Install 90mm  
Diameter Cut Out

- 3CCT - Store one fitting, rather than three! Easily switch between 3000k (Warm White) / 4000k (Cool White) / 6000k (Daylight White)
- Ideal retrofit for R63/R80, HiSpot63 and HiSpot80 downlighters
- Quick to fit and easy to install
- Ideal for shallow ceiling voids
- Magnetic bezels can be easily swapped after installation
- Zero maintenance costs
- Comes with three bezels – brushed steel, chrome and white

## APPLICATIONS



Commercial



Offices




Retail



# 12W R63-R80 REFLECTA LED DOWNLIGHTER

Ideal Retrofit for R63/R80, HiSpot63 and HiSpot80 Downlighters

ITEM #	230427
DESCRIPTION	3 colour LED Downlight comes with three bezels - brushed steel, chrome and white
LIGHT COLOUR	3000k/4000k/6000k
LUMENS	1200lm
DIMENSIONS	Downlight: 105 x 37 + 3mm front = 40mm total. Driver: 125 x 42 x 28mm
COLOUR RENDITION (CRI)	Ra 80>
BEAM ANGLE	60°
POWER CONSUMPTION	12W
POWER FACTOR	0.9
CURRENT	285mA
DRIVER	LENNEL terminals
WORKING TEMPERATURE	-30°C to 45°C
CONSTRUCTION	Cast aluminium housing
IP RATING	IP65 bezel only
FIRE RESISTANT	BS476-21 30-60-90min
CERTIFICATION	CE, RoHS, SELV
ENERGY CONSUMPTION (EC)	12kWh
WARRANTY	5 Year

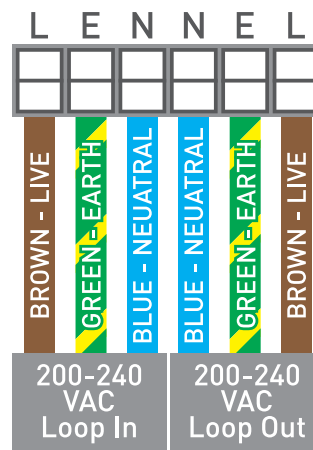


What is a LENNEL Configuration?

By placing the Earth wire between the Live and Neutral wire, they can't be close enough to one another to cause a short circuit.

Multiple benefits are:

- Simpler circuit board resulting in the ability to use wider and stronger circuit board tracks
- Less likely to short circuit on the board from minor damage
- Less likely to short circuit on the terminal blocks if there has been poor insertion of the mains cable
- Easier to wire. When the wire is cut, it automatically makes the LEN switch to NEL due to the wire making a 180° turn

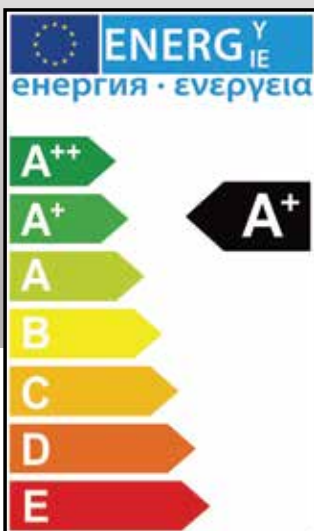

TRUSTED QUALITY AND INNOVATION SINCE 2006

