

LED BATTEN FITTING

Universal fixing points for easy fluorescent retrofit



APPLICATIONS



Corridors and
Circulation Areas



Hospitals



Schools
and Offices



Store Rooms



Workshops
and Garages



Emergency
Version Available



BESA Mounting Kit
Compatible



Flicker
Free



PIR Option
Available

- Sleek, stylish appearance – no visible screws or fixings
- Innovative clip on fascia for quick and easy installation
- Powerful 110lm/per Watt
- Flexible cable mounting position – allows for multiple application use
- Universal mounting holes, a direct replacement for 95% of all fluorescent battens
- Strong slimline polycarbonate diffuser for optimum light distribution
- Excellent colour rendering (Ra80>)
- Steel body gives excellent rigidity
- Emergency and PIR options available


BRIGHT
SOURCE
™
smarter lighting

LED BATTEN FITTING

Universal fixing points for easy fluorescent retrofit

ITEM #	233008	233015	233022	233039	233046	233053
WATTS	23W	40W	38W	60W	48W	65W
DESCRIPTION	4ft Single	4ft Twin	5ft Single	5ft Twin	6ft Single	6ft Twin
EMERGENCY CONVERSION PART CODE	233060	233077	233084	233091	233107	233114

LUMENS	2760lm	4400lm	4180lm	6600lm	5280lm	7150lm
COLOUR	Cool white (4000K)		Cool white (4000K)		Cool white (4000K)	
BEAM ANGLE	140°		140°		140°	
POWER CONSUMPTION	220-240V AC		220-240V AC		220-240V AC	
POWER FACTOR	0.9		0.9		0.9	
CURRENT	1000mA		1000mA		1000mA	
LED TYPE	2835 SMD		2835 SMD		2835 SMD	
WORKING TEMPERATURE	-20 to +45°C		-20 to +45°C		-20 to +45°C	
CONSTRUCTION	Steel/PolyCarb diffuser		Steel/PolyCarb diffuser		Steel/PolyCarb diffuser	
IP RATING	IP20		IP20		IP20	
CERTIFICATION	CE, RoHS		CE, RoHS		CE, RoHS	
ENERGY CONSUMPTION (EC)	23kWh/40kWh		38kWh/60kWh		48kWh/65kWh	
BUILDING REGS - PART L	Yes		Yes		Yes	





Emergency
Warranty

One year warranty
on battery



SPEAK TO THE TEAM FOR DETAILS ON OUR BESPOKE MANUFACTURING SERVICES

DIMMABLE OPTIONS	EMERGENCY OPTIONS	SENSOR OPTIONS
DSI - Digital / Switch Dimming	EM3r - Standard Integral Emergency	PIR
AD - Analogue 1-10v	EM3r-ST-Integral Emergency Self Test	PIR/DALI
DALI - Dali Addressable	EM3r-CB - Integral Emergency to Suit Central Battery System	PIR - AD
TRI - Mains TRIAC Leading Edge	EM3r-DALI - Inegral Emergency DALI Addressable	PIR - HS 20m mounting height

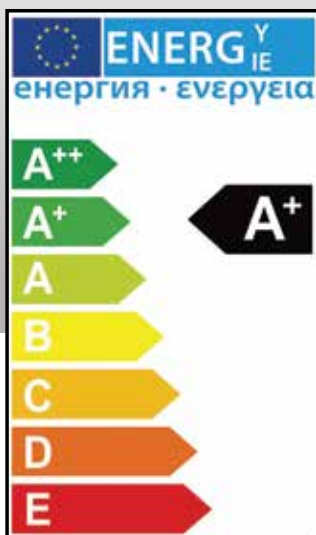

TRUSTED QUALITY AND INNOVATION SINCE 2006

