

# 40W LED PANEL

600 x 600mm Specification



Dimmable  
Options



IP20  
Rated



Emergency  
Version Available

## APPLICATIONS



Offices



Education



Retail





Commercial  
Kitchens

- Energy efficient backlit panel
- 3 year warranty
- Anti-discolouration
- Emergency, dimmable and sensor options available

# 40W LED PANEL

600 x 600mm Specification

ITEM #	3000k - 223474	4000k - 223481	6000k - 223498
DESCRIPTION	LED Panel 595 x 595 x 30mm 40W 3000k White Frame	LED Panel 595 x 595 x 30mm 40W 4000k White Frame	LED Panel 595 x 595 x 30mm 40W 6000k White Frame
LIGHT COLOUR	3000k	4000k	6000k
LUMENS	3600lm	3600lm	3600lm
DIMENSIONS	595 x 595 x 30mm	595 x 595 x 30mm	595 x 595 x 30mm
COLOUR RENDITION (CRI)	Ra80	Ra80	Ra80
BEAM ANGLE	90°	90°	90°
POWER CONSUMPTION	40kWh/1000hrs	40kWh/1000hrs	40kWh/1000hrs
POWER FACTOR	0.90	0.90	0.90
CURRENT	1000mA	1000mA	1000mA
DRIVER	BRIGHT SOURCE	BRIGHT SOURCE	BRIGHT SOURCE
LAMP TYPE	SMD2835 9v 100ma	SMD2835 9v 100ma	SMD2835 9v 100ma
WORKING TEMPERATURE	-10 to +40c	-10 to +40c	-10 to +40c
CONSTRUCTION	PS+AL+Steel	PS+AL+Steel	PS+AL+Steel
IP RATING	IP20	IP20	IP20
CERTIFICATION	CE, RoHS	CE, RoHS	CE, RoHS
ENERGY CONSUMPTION (EC)	A+	A+	A+
WARRANTY	3 Years	3 Years	3 Years

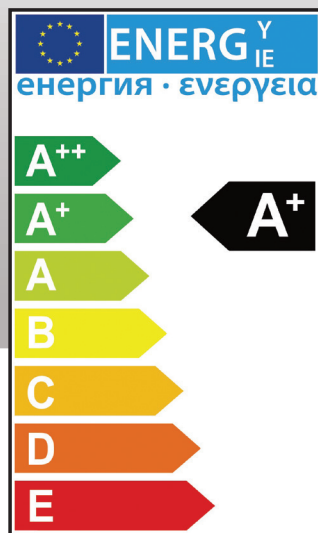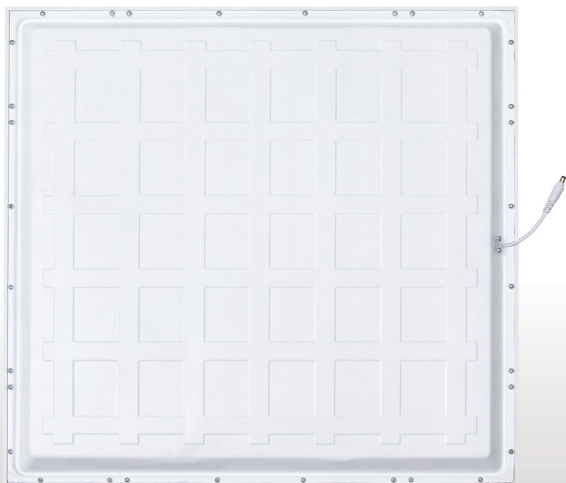

## SPEAK TO THE TEAM FOR DETAILS ON OUR BESPOKE MANUFACTURING SERVICES

DIMMABLE OPTIONS	EMERGENCY OPTIONS	SENSOR OPTIONS
DSI - Digital / Switch Dimming	EM3r - Standard Integral Emergency	PIR
AD - Analogue 1-10v	EM3r-ST-Integral Emergency Self Test	PIR/DALI
DALI - Dali Addressable	EM3r-CB - Integral Emergency to Suit Central Battery System	PIR - AD
TRI - Mains TRIAC Leading Edge	EM3r-DALI - Integral Emergency DALI Addressable	PIR - HS 20m mounting height

TRUSTED QUALITY AND INNOVATION SINCE 2006

